

# NetFocus 5BRID DVR (4, 8ch)




## Features

- TVI / AHD / CVI / CVBS / IP Video input
- 1080p Real time recording
- 4 x HDD support (Max 6TB each)
- E-SATA
- Onvif Profile Compatible
- Dual LAN & Auto IP Camera Scan
- Smart phone support,
- Easy Interface, Strong Network
- Safety Storage with Auto backup
- DVD-RW (Optional)
- Connection with POS equipment

## Dimension

Unit : mm

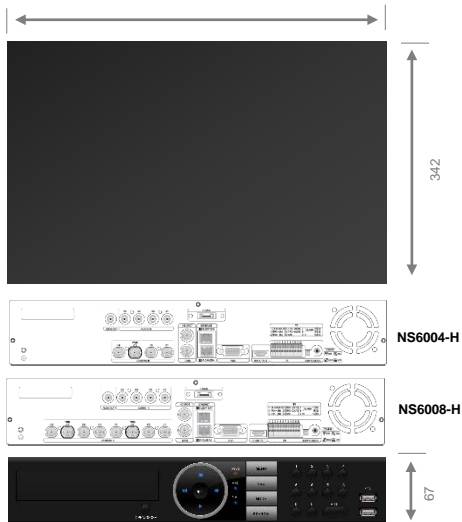

## Specification

	MODEL	NS-6004H	NS-6008H
<b>DISPLAY</b>			
Live	Resolution	1920 x 1080 or 1024 x 768 (by rear DIP switch)	
	Display Mode	1, 4	1, 4, 8
	Digital Zoom	Up to x 7	
<b>INTERFACE</b>			
Video In	Input(BNC)	4	8
	Input(IP CAM)	Max.1	Max.2
	<b>Total Video input</b>	<b>4</b>	<b>8</b>
Video Out	HDMI	1	
	VGA	1	
	Composite	1	
Audio	Input(RCA)	4	8
	Output	1 (HDMI, RCA)	
Interface	USB 2.0	3	2
	RS-485	1	2
	E-SATA	1	
	Ethernet	1	2
	Sensor Input	4	4
	Alarm Output	1	1
SATA	Max. 4 x SATA HDD or Max. 2 x SATA HDD + ODD		
<b>PERFORMANCE</b>			
Compression Algorithm	Video : H.264, Audio : G726		
Operating System	Embedded Linux		
Multi-Operation	Pentaplex (Live, Recording, Playback, Backup, Network)		
Recording	1080P	Up to 120(100)fps	Up to 240(200)fps
	720P	Up to 120(100)fps	Up to 240(200)fps
	960x480(960x576)	Up to 120(100)fps	Up to 240(200)fps
	Mode	Manual / Continuous / Schedule / Motion / Sensor / Pre or Post, Panic	
Playback	Pre-alarm	0-5sec	
	Post-alarm	0-120sec	
	Search	Search by Time / Calendar / Events / Thumbnail / First&Last / Instant	
Backup	Speed	1x, 2x, 4x, 8x, 32x, 128x	
	Backup Device	USB Memory Stick/HDD, DVD-RW & Backup by Network	
Events & Alarm	Backup File Format	AVI (With or Without Timestamp), PS (Playback in Backup-Viewer)	
	Events & Alarm	Email & FTP Notification / Push notification / Alarm-out / Buzzer for Events & Video Loss Warning Message & Buzzer for HDD Over-Temperature	
Network	Transmission	Video Dual-Stream (Local recording & Network Transmission)	
		Bandwidth adjustable (64/128/256/512Kbps, 1/2/4/10Mbps, Unlimited)	
	Netclient/Web(I.E.)	Live , Playback, Backup , PTZ, DVR Setup	
	Mobile Viewer	Supported by Android OS, iOS(Iphone)	
<b>GENERAL</b>			
Power	DC12V 5A	DC12V 5.83A	
Storage temperature & humidity	-20~60 °C / 20~95% RH		
Operating temperature & humidity	5~40 °C / 20~80% RH		
Dimension (W x D x H)	380 X 342 X 67 mm		
Weight	5.5kg		

※ Above Specification is subject to change without prior notice to improve performance.

# NetFocus 5BRID DVR (16ch)




## Features

- TVI / AHD / CVI / CVBS / IP Video input
- 5 x HDD support (Max 6TB each)
- E-SATA
- Rack Mountable
- Smart phone support,
- Easy Interface, Strong Network
- Safety Storage with Auto backup
- DVD-RW (Optional)
- Connection with POS equipment

## Dimension

Unit : mm

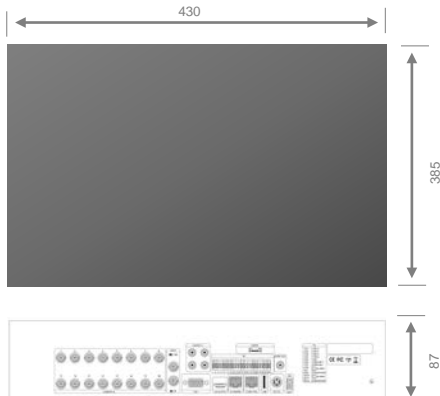

## Specification

MODEL		NS8016-H
<b>DISPLAY</b>		
Live	Resolution	1920 x 1080 or 1024 x 768 (by rear DIP switch)
	Display Mode	1, 4, 9, 16
	Digital Zoom	Up to x 7
<b>INTERFACE</b>		
Video In	Input(BNC)	16
	Input(IP CAM)	Max.4
	<b>Total Video input</b>	<b>16</b>
Video Out	HDMI	1
	VGA	1
	Composite	1
	SPOT	1 (Analogue HD - TVI)
	Loop	-
Audio	Input(RCA)	16
	Output	1 (HDMI, RCA)
Interface	USB 2.0	2
	RS-485	2
	RS-232C	1
	E-SATA	1
	Ethernet	2
	Sensor Input	16
	Alarm Output	4
	SATA	Max. 4 x SATA HDD + ODD or Max. 5 x SATA HDD
<b>PERFORMANCE</b>		
Compression Algorithm	Video : H.264, Audio : G726	
Operating System	Embedded Linux	
Multi-Operation	Pentaplex (Live, Recording, Playback, Backup, Network)	
Recording	1080P	Up to 480(400)fps
	720P	Up to 480(400)fps
	960x480(960x576)	Up to 480(400)fps
	Mode	Manual / Continuous / Schedule / Motion / Sensor, Pre/Post, Panic, Instant
	Pre-alarm	0-5sec
	Post-alarm	0-120sec
Playback	Search	Search by Time, Calendar , Events, Panorama, First/Last Search
	Speed	1x, 2x, 4x, 8x, 32x, 128x
Backup	Backup Device	USB Memory Stick/HDD, DVD-RW & Backup by Network
	Backup File Format	AVI (With or Without Timestamp) PS (Playback in Backup-Viewer)
Events & Alarm		Email & FTP Notification / Alarm-out / Buzzer for Events & Video Loss Warning Message & Buzzer for HDD Over-Temperature
Network	Transmission	Video Dual-Stream (Local recording & Network Transmission) Bandwidth adjustable (64/128/256/512Kbps, 1/2/4/10Mbps, Unlimited)
		Netclient / Web (I.E.)
	Mobile Viewer	Supported by Android OS, iOS (iphone)
	<b>GENERAL</b>	
Power	DC12V 7.5A	
Storage temperature & humidity	-20~60 °C / 20~95% RH	
Operating temperature & humidity	5~40 °C / 20~80% RH	
Dimension (W x D x H)	430 X 385 X 87 mm	
Weight	7.5kg	

※ Above Specification is subject to change without prior notice to improve performance.